

LED 4W Driver

Product code: T-4350

Standards

Converter meets CE standards
 Approved by UL as a class 2 recognized component
 File # E193999
 VDE and VDE EMV pending
 IP67

Mechanical and Thermal

European version

Dimensions(mm) 45 x 45 x 25
 Weight 92.8 grams
 Tc Max 90°C
 Ta Max 50°C
 Output wire – 18AWG 200°C
 Input wire – Blue, Brown FEP/FEP
 0.75mm² 300/500V 180°C
 Waterproof potting



Protection and Regulation

Electronic internal resettable short circuit protection. Thermal protection and overload regulation.



Electrical

Load 1-4VA
 Input 100-240V 0/50/60Hz
 Output current 350mA±8%
 Output voltage 2-14V
 EMC (RFI) FCC Class B/EN 55015
 Harmonics EN 61000-3-2
 Electrostatic Discharge IEC61000-4-2
 EMC Immunity IEC61000-4-3
 Burst IEC61000-4-4
 Surge IEC61000-4-5
 Injected RF IEC61000-4-6
 Mains interruption IEC61000-4-11
 Immunity EN 61547/61047
 Safety EN 61347-2-2
 SELV

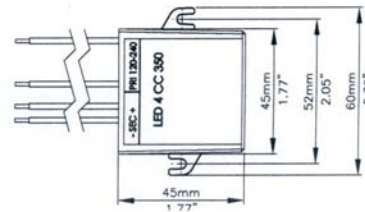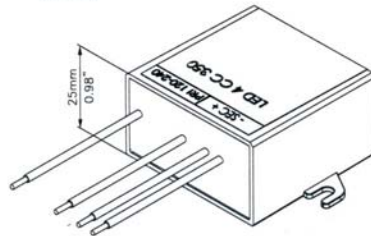

LED 10W Driver

Product code: T-10350

Standards

Converter meets CE standards
 Approved by UL as a class 2 recognized component
 File # E254177
 IP 67

Mechanical and Thermal

PC plastic casing
 Dimensions (mm) 28 x 40 x 100
 Dimensions (in) 1.10" x 1.57" x 3.93"
 Weight 90 grams / 3 ounces
 Tc Max 90°C
 Ta Max 50°C
 Terminal Block Connection
 Waterproof potting

Protection and Regulation

Electronic internal resettable short circuit protection. Thermal protection and overload regulation.

Electrical

Load 1-10VA
 Input 95-265V 0/50/60Hz
 Output current 350mA±6%
 Output voltage 2-28V
 Efficiency 80%
 EMC (RFI) FCC Class B/EN 55015
 Harmonics EN 61000-3-2
 Immunity EN 61547/61047
 Safety EN 61347-2-2
 SELV

