


Lawn Lite Deck Mount Version

Cat. No. LLDMV



The Lawn Lite Deck Mount version is designed to be mounted into timber decks. The lamp can be directed up to 20 degrees at a bush, tree, or the outside of a building etc. without the need to remove the luminaire from the deck due to the vandal-resistant three stainless steel allen head screw fixing system, which attaches the flange to the body of the luminaire. The 'Flush Fit' lens stops water pooling and depositing dirt on the lens. The luminaire has a solid bronze or 316 stainless steel flange with a powder coated black body.

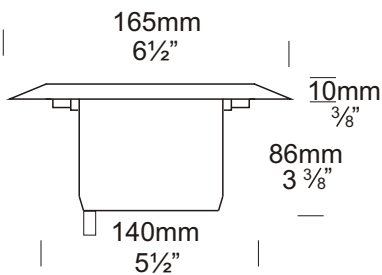

Ordering Information

Luminaire Type

LLDMV - Lawn Lite
Deck Mount

Flange Option

SBZ - Solid Bronze
SS - 316 Stainless Steel

Body

Black only

Accessories

CJK150 - Cable Joint Kit
HCR - Hex Cell Louvre
LENSLLF - Frosted Lens
For an alternative LED
option start at page 10.4

Ordering Example: LLDMV SS - Lawn Lite Deck Mount with
316 Stainless Steel Flange

LENSLLF - Frosted Lens

(Accessories ordered separately)

HUNZA™ PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.

© 2009 Hunza Holdings Ltd.

Ver 1.4

Luminaire Construction

Body:

Cast from virgin high corrosion resistant CC401 low copper aluminium alloy, with chromate substrate and high UV resistant polyester powder coat

Body Colour: Black.

Flanges:

The flange is attached to the body by three 316 stainless steel allen head anti vandal screws and is available in either

Powder coated, cast aluminium or CNC machined from one of the following metals:

Solid Bronze - 165mm (6½") bar.

Solid 316 Stainless Steel - 165mm (6½") rod.

Mounting

Deck mount version for mounting through a 145mm (5½") hole in a wooden or concrete deck.

The Lawn Lite Deck Mount is not suitable for driving over.

Features

Lens:

12mm (½") 'Flush Fit' clear tempered shatter resistant glass.

Life Time Warranty.

Gasket:

Nytral 220°C (428°F).

Lamp Holder:

GU5.3 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables. Lamp holder can be rotated 360° and angled up to 20°.

Accessories:

Cable Joint Kit (Cat. CJK150).

Not approved for USA/Canada.

Frosted Lens (Cat. LENSLLF).

Hex Cell Louvre (Cat. HCR).

Standards

IP66



UL1838

Luminaire Weight

BRZ 1.220kg (2lbs 11oz)

SS 1.510kg (3lbs 5oz)

Power Supply

HUNZA™ Inground or Wall Mount Transformer: not included.

USA and Canada:

HUNZA™ Wall Mount Transformer: not included.

Luminaire: supplied with










MR16 GU5.3 20, 35 or 50 watt lamp max.

LED - Refer sheet no. 10.4

USA and Canada:

MR16 GU5.3 20 watt lamp max.

LED - Refer sheet no. 10.4

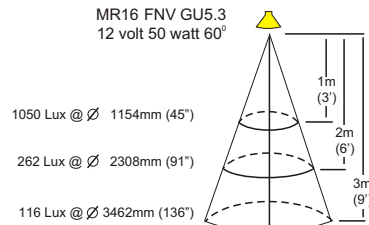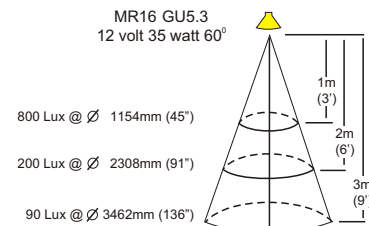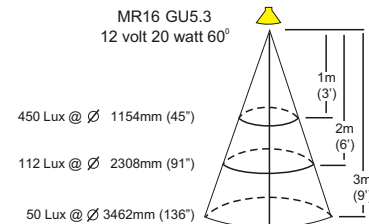

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2009 Hunza Holdings Ltd.

Ver 1.4