


Spike Spot Adjustable

Cat. No. SS/A



The Spike Spot Adjustable has been designed for easy installation into the earth and is ideal for illuminating a bush, tree or any landscape feature. The fully adjustable head allows 360 degree rotation and 0 - 90 degree elevation. This luminaire uses a MR16 GU 5.3 lamp.

This luminaire is machined from a choice of 10mm thick aluminium with a UV stable powder coated finish, solid copper or 316 stainless steel with a clear, tempered, flush glass lens and high temperature silicon gaskets.

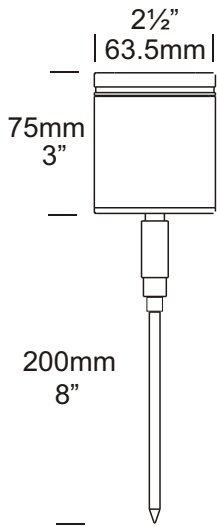

Ordering Information

Luminaire Type	Material/Finish	Accessories
SS/A - Spike Spot Adjustable	BK - Black BZ - Bronze GN - Green STAR - Silver Star COP - Copper SS - 316 Stainless Steel	CJK150 - Cable Joint Kit LENSSTEPF - Frosted Lens GG - Glare Guard HCL - Hex Cell Louvre Adaptor /300 - Ground Spike 300mm (12") For an alternative LED option start at page 10.4
Ordering Example SS/A COP - Spike Spot Adjustable in Copper GG BK - Glare Guard in Black (Accessories ordered separately)		



Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium. End cap - solid aluminium 63.5mm (2½") rod, with chromate substrate and high UV resistant polyester powder coat

Colours Black, Bronze, Green, Silver Star.

Copper 63.5mm (2½") x 10mm (13/32"). End cap - solid copper 63.5mm (2½") rod.

316 Stainless Steel 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2½") rod.

Mounting

Ground spike 150mm (6") or 300mm (12") directly into the earth.

Features

Lens:

10mm (3/8") clear flush fit shatter resistant glass.

Life Time Warranty

Gasket:

Silicone, iron impregnated 220°C (428°F)

Lamp Holder:

GU5.3 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

Accessories:

Cable Joint Kit (Cat. CJK150)

Not approved for USA /Canada.

Frosted Lens (Cat. LENSSTEPF).

Glare Guard (Cat. GG).

Hex Cell Louvre Adaptor (Cat. HCL).

300mm (12") Spike (Cat. /300).

Swivel:

Aluminium and Copper luminaires - 360° rotation and 0 - 90° elevation, solid brass with anti rust spring.

Stainless Steel luminaires - 360° rotation and 0 - 90° elevation, full stainless steel construction.

Standards

IP66



UL1838

Luminaire Weight

Alum .490kg (1lb 1oz)
Cop 1.240kg (2lb 11oz)
SS 1.080kg (2lb 6oz)

Power Supply

HUNZA™ Inground or Wall Mount Transformer: not included.

USA and Canada:

HUNZA™ Wall Mount Transformer: not included.

Luminaire: supplied with MR16 GU5.3 - 20, 35 or 50 watt lamp max.










LED - Refer sheet no. 10.4

USA and Canada:

MR16 GU5.3 20 watt lamp.

LED - Refer sheet no. 10.4

When glare guard fitted lamp wattage can be increased to 35 watts.

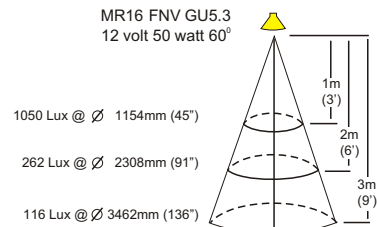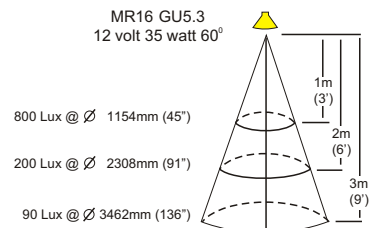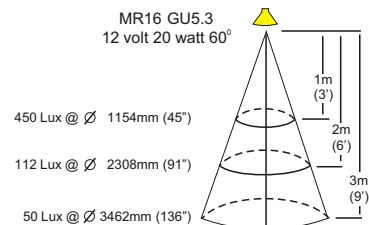

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2009 Hunza Holdings Ltd.

Ver 1.4